


# Technical data sheet

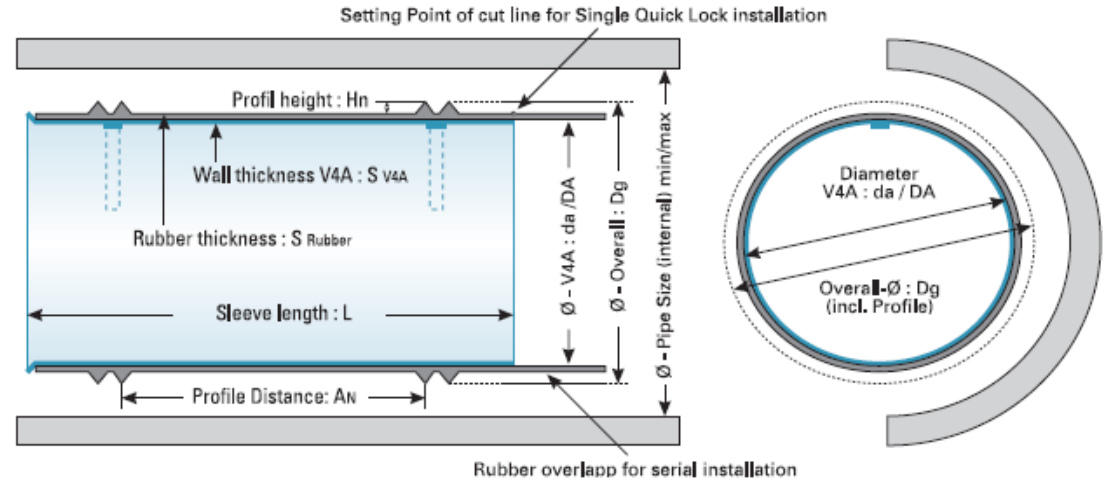

## QUICK-LOCK mini DN 100-DN 150

Quick-Lock Mini	Rubber jacket DN	Total diameter rolled	Suitable for pipes from / to		Packer	Stainless steel sleeve			Rubber jacket	
			Pipe ID min.	Pipe ID max.		Wall thickness s	V4A pipe rolled da	Max. expanded diameter DA	Rubber thickness	Height of seals
mm	mm	mm	mm	mm		mm	mm	mm	mm	mm
Designation	Designation	Dg	DN min	DN max	VP	S V4A	da	DA	S Rubber	Hn
0100-090 <sup>1</sup>	140 <sup>3</sup>	90	97	107	VP 100-150 VFW	0,6	81	102	1,5	3,0
0100-140 <sup>2</sup>	140	90	97	107	VP 100-150 VFW	0,6	81	102	1,5	3,0
0125-090 <sup>1</sup>	140 <sup>3</sup>	109	122	132	VP 100-150 VFW	0,6	100	127	1,5	3,0
0125-140 <sup>2</sup>	140	109	122	132	VP 100-150 VFW	0,6	100	127	1,5	3,0
0150-090 <sup>1</sup>	140 <sup>3</sup>	128	130	154	VP 100-150 VFW	0,8	118	145	2,0	3,0
0150-140 <sup>2</sup>	140	128	130	154	VP 100-150 VFW	0,8	118	145	2,0	3,0

<sup>1</sup> Sleeve can be used in bended pipes (bends up to 45°)

<sup>2</sup> Sleeve can only be used in straight pipes

<sup>3</sup> EPDM rubber must be shortened