


# QUICK LOCK

## Technical data sheet

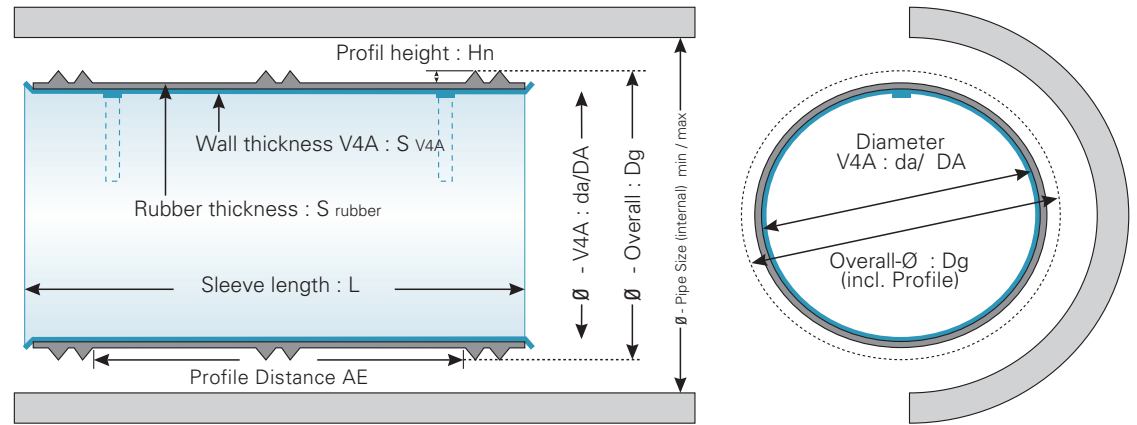

### QUICK-LOCK Mini DN 100 - DN 150

Quick-Lock Mini		Sleeve Length	Total diameter rolled	Suitable for pipes von / bis		Sealed area single installation	Packer	Stainless steel sleeve			EPDM Rubber			Total weight
				Pipe ID min.	Pipe ID max.			Wall thickness	V4A pipe rolled	Max. expanded diameter	EPDM Rubber	Rubber thickness	Height of seals	
mm	inch	mm	mm	mm	mm	mm	VP	mm	mm	mm	mm	mm	mm	Kg
DN	L	Dg	DN min	DN max	AE		S V4A	da	DA	DN	S Rubber	Hn		
0100-090 <sup>1</sup>	4"	90	91	91	105	52	VP 100-150 VFW / VP 100-125 Bogen	0,6	85	100	100-140 <sup>3</sup>	1,5	3,0	0,25
0100-0145 <sup>2</sup>	4"	145	91	91	105	100	VP 100-150 VFW	0,6	85	100	100-140	1,5	3,0	0,37
0125-090 <sup>1</sup>	5"	90	95	101	126	52	VP 100-150 VFW / VP 100-125 Bogen	0,6	89	118	125-140 <sup>3</sup>	1,5	3,0	0,28
0125-0145 <sup>2</sup>	5"	145	95	101	126	100	VP 100-150 VFW	0,6	89	118	125-140	1,5	3,0	0,40
0150-090 <sup>1</sup>	6"	90	126	133	154	52	VP 100-150 VFW / VP 150 Bogen	0,8	120	146	150-140 <sup>3</sup>	2,0	3,0	0,43
0150-0145 <sup>2</sup>	6"	145	126	133	154	100	VP 100-150 VFW	0,8	120	146	150-140	2,0	3,0	0,66

<sup>1</sup> Sleeve can be used in bended pipes (bends up to 45°).

<sup>2</sup> Sleeve can only be used in straight pipes.

<sup>3</sup> EPDM Rubber must be shortened.

All sleeves are only produced with double flaring.